


WORLDWIDE EXHIBITIONS ANKO ATTENDED

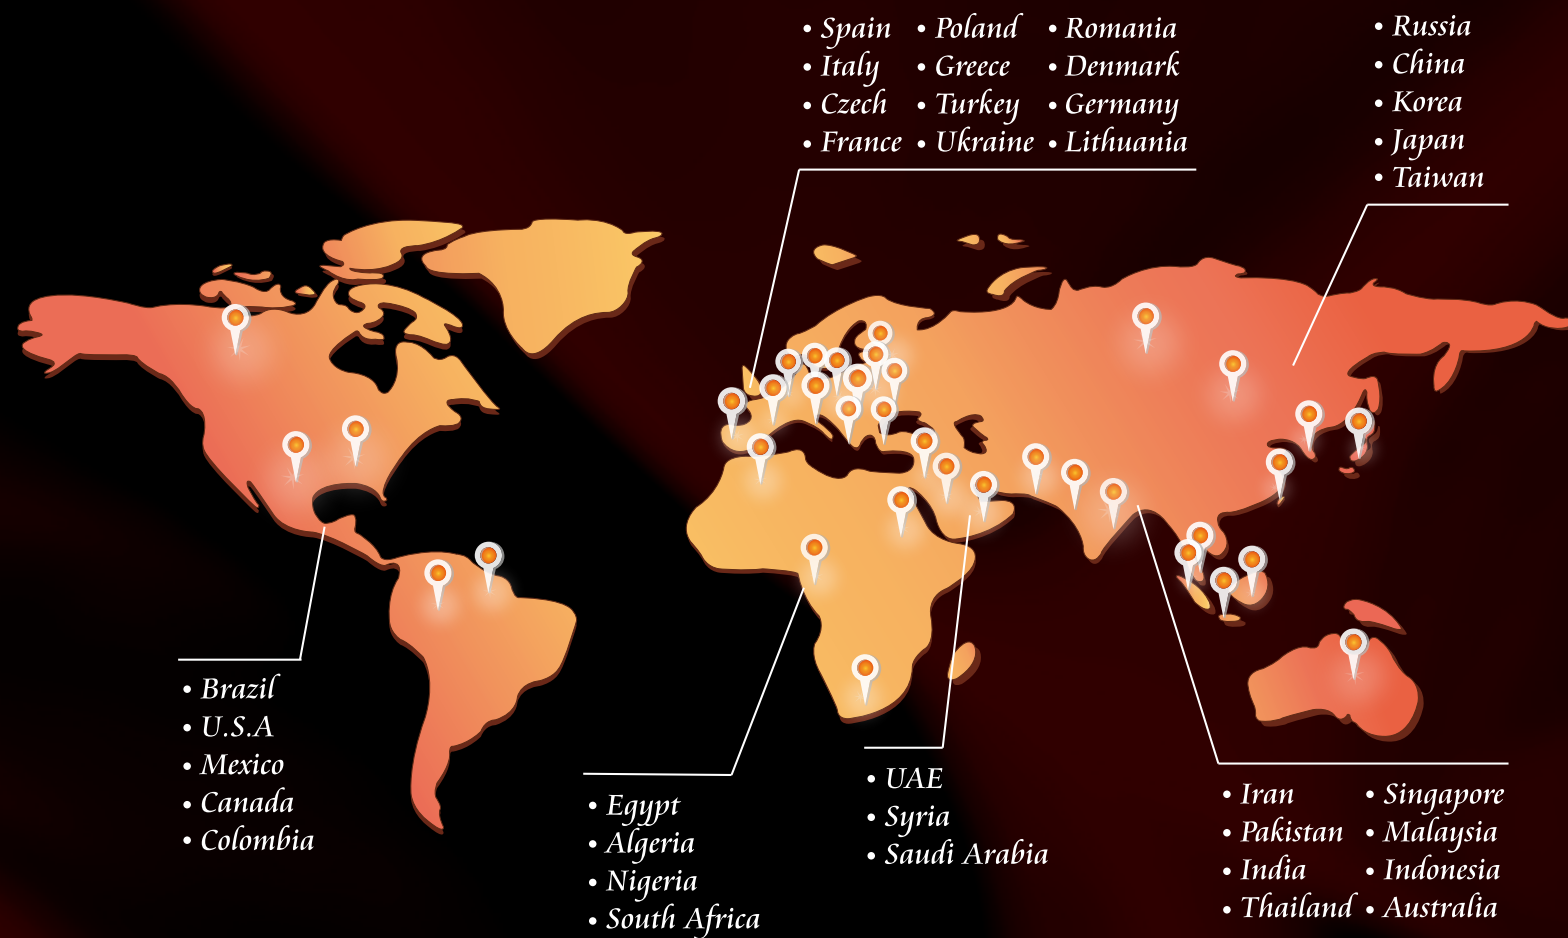

▲ 2015 Foodtech & Pharmatech Taipei

Anko Food Machine Co., Ltd. provides customers the best after-service and consultations.

Until the end of 2015, our food processing machines have been exported to more than 108 countries.

In the future, Anko will continue to serve customers with our best professional spirit.

www.anko.com.tw

Over 15 Exhibitions Per Year



▲ 2015 IBA Fair in Germany



▲ 2015 Gulfood Fair in Dubai



Global Headquarters : ANKO Food Machine Co., Ltd. -Taiwan



Branch office : ANKO Food Tech Inc. - North America



Ningbo ANKO Food Machinery Co., Ltd. - China

INDEX

- 5 ▶ **HLT-700 & HLT-700XL** Multipurpose Filling & Forming Machine
- 7 ▶ **HLT-700DL** Double Line Multipurpose Filling & Forming Machine
- 8 ▶ **EA-100KA** Automatic Mini Juicy Bun and Manty Machine
- 9 ▶ **AFD-888** Automatic Dual Line Imitation Hand Made Dumpling Machine
- 11 ▶ **HSM-600 SERIES** Automatic Single Line and Double Line Shumai Machine
- 12 ▶ **NSM-400** Semi Automatic Seaweed Shumai Machine
- 13 ▶ **HWT-SERIES** Automatic Double Line & Triple Line Wonton Machine
- 14 ▶ **SD-97SS** Table Type Automatic Encrusting and Forming Machine
- 15 ▶ **SD-97W** Automatic Encrusting and Forming Machine
- 16 ▶ **SD-97L** Automatic Encrusting and Forming Machine
- 17 ▶ **SD-97W+STA-360** Automatic Maamoul and Moon Cake Production Line
- 19 ▶ **RC-180** Automatic Rounding Machine
- 20 ▶ **BN-24** Fully Automatic Blini Production Line
- 21 ▶ **SR-24** Spring Roll Production Line
- 23 ▶ **SRP-SERIES** Automatic Spring Roll, Samosa Pastry Sheet and Crepe Machine
- 24 ▶ **SRPF-SERIES** Semi-Automatic Spring Roll and Samosa Production Line
- 25 ▶ **Optional Equipment Of Spring Roll Machine**
- 26 ▶ **RPS-SERIES** Vietnamese Rice Paper Spring Roll Machine
- 27 ▶ **FSP** Fully Automatic Finger Spring Roll Production Line
- 28 ▶ **FSPC** Automatic Single/ Double Production Line of Sealed Ends Finger Spring Roll
- 29 ▶ **SP-SERIES** S Production Line - Make up line
- 31 ▶ **MP-SERIES** M Production Line
- 33 ▶ **BP-SERIES** B Production Line
- 35 ▶ **Kibbi Mosul Pastry Production Line**
- 36 ▶ **PP-2** Automatic Filming and Pressing Machine
- 37 ▶ **APB** Pressing & Heating Machine
- 38 ▶ **GD-12 SERIES** Automatic Cutting And Rounding Machine
- 39 ▶ **FMB-60** Automatic Meat Ball and Fish Ball Production Plant
- 40 ▶ **SF-SERIES** Multiple Function Stir Fryer
- 41 ▶ **CS-480** Automatic Horizontal Cake Slicer
- 42 ▶ **SK-60/SL-110** Ice Box Cookies Extruder and Slicer
- 43 ▶ **BBCB** Automatic Batter And Crumb Breading Production Line
- 44 ▶ **AS-SERIES** Steamer
- 45 ▶ **DS-650** Dough Sheeter
- 46 ▶ **Food Processing Machine**

ANKO HISTORY

ANKO FOOD MACHINE CO., LTD. was established in 1978. Initially we produced only automatic seed sprouters, then extended to a full range of high-tech food processing machinery, including Automatic Spring Roll, Dumpling, Ravioli, Samosa, Meat Bun, Shumai, Wonton, Empanada, Kubba, Maamoul and other kinds of ethnic food making machine.

ANKO concentrates equal enthusiasm on every aspect of our company to establish the enterprise culture of service perfection, quality superiority, and never-ending research, development and improvement. We aim to provide clients with comprehensive satisfaction.

ISO 9001 and the auditing systems assure quality procedures are reviewed, examined and audited on a frequent basis for the adequacy.

To meet the worldwide demand, we established a branch company, ANKO Food Tech Inc. in California, USA and a factory in Ningbo, China. We have professional team members and engineers to provide worldwide support.

If you are looking for a professional and qualified supplier of food machines, ANKO can be your best choice.



ISO 9001 Approved



Testing Kitchen



Customer Experience Center



Lobby



Office



On Site Precision Welding



Production Line

Multipurpose Filling & Forming Machine

Independent motors are equipped in HLT-series to produce a wide range of food products with dough wrapper and stuffing inside. By simply changing the forming molds, the HLT-series can make dumpling, potsticker, samosa, empanada, tortellini, ravioli, pasta, egg roll, calzone, apple pie, pelmeni, pierogi, etc.

Unique Water Cooling System

HLT-series is equipped with a water cooling system to prevent degradation of dough quality from heat generated by dough compressing.

Wide Range of Dough Compositions

The wide range of dough composition allows different dough textures. Water content in dough varies from 30 % to 50 %, and could be cold, warm or hot to make wrappers tender after boiling or steaming.



Video



HLT-700



Various Sizes for Choice

Production Capacity (depends on the size of products)					
	Capacity (pcs/hr)			Capacity (pcs/hr)	
Model	HLT-700	HLT-700XL	Model	HLT-700	HLT-700XL
Dumpling	1,500-15,000	3,000-30,000	Potsticker	5,000-6,000	3,000-8,000
Egg Roll, Apple Pie	2,500-4,000	3,000-15,000	Samosa	5,000-9,000	3,000-15,000
Crystal Dumpling	7,500	3,000-10,000	Ravioli	6,500-12,000	5,000-15,000
Curry Puffs, Empanada	4,500	3,000-6,000	Noodle	300 kgs/hr	420 kgs/hr

* Production capacity is for reference only; it will change according to different product specification and recipe.

Specifications

Model	HLT-700	HLT-700XL
Length	1100 mm	1150 mm
Width	650 mm	570 mm
Height	2100 mm	1700 mm
Electricity	220/380/415 V, 50/60 Hz, Single/3 Phase, 2.3 kW	220/380/415 V, 50/60 Hz, Single/3 Phase, 4.0 kW
Product Weight	2~160 g	2~200 g
Motor System	Three Independent Motors	Four Independent Motors
Stuffing Hopper Capacity	20 L	35 L
Net Weight	320 kgs	450 kgs

* Specifications are subject to change without notice.



Various Kinds of Pattern


HLT-700 & HLT-700XL

Features of HLT-700XL

- All kinds of cubed and diced filling : meat, cheese, shrimp, etc.
- Large filling hopper.
- Longer dough propeller & sheath keep the quality of dough.
- Suitable for different kinds of dough such as samolina, yeast dough, wheat flour dough, pastry dough, etc.
- Optional special equipment for hargao (shrimp dumpling).



▲ Stuffing is extruded smoothly by a rotor pump.

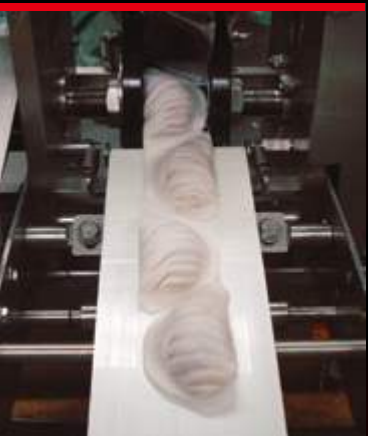

Optional hargao forming mold set

Weight of product : 20, 25, 30 g/pc
Capacity : 2,000-2,500 pcs/hr



- Taiwan Patent No.: 138136, 139367, I354541
- China Patent No.: ZL 97 2 42853.4, ZL 98 2 25455.5, ZL 97 2 42852.6, ZL 2009 2 0009305.3, ZL 97 3 13954.4



HLT-700XL



Video

Double Line Multipurpose
Filling & Forming Machine

HLT-700DL, one of ANKO main machine, is available to produce dumplings with uniform size and beautiful shape and achieve high productivity up to 60,000 pieces per hour. It can significantly increase productivity, decrease labor cost and save ingredient, also by simply changing the forming molds, it can produce a variety food, such as dumpling, hargao, samosa, ravioli, pasta, pierogi, pelmeni, calzone, empanada etc.



Video



Specifications


Length	1700 mm
Width	850 mm
Height	1710 mm
Electricity	220/380/415V, 50/60Hz, 3 Phase, 11kW
Capacity	84 L
Stuffing Hopper Capacity	3,600-60,000 pcs/hr
Net weight	930 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.

Production Capacity (depends on the size of products)

	Capacity (pcs/hr)		Capacity (pcs/hr)
Dumpling	3,000-30,000	Potsticker	10,000-12,000
Egg Roll, Apple Pie	5,000-8,000	Samosa	10,000-18,000
Crystal Dumpling	15,000	Ravioli	13,000-24,000
Curry Puffs, Empanada	9,000	Noodle	600 kgs/hr

* Production capacity is for reference only; it will change according to different product specification and recipe.

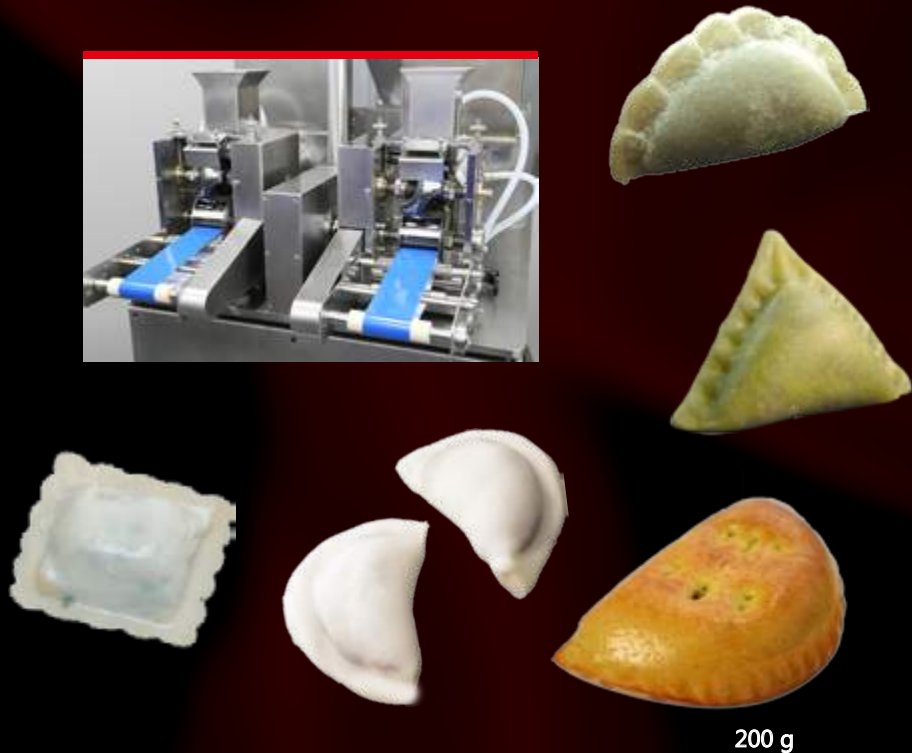

200 g

Automatic Mini Juicy Bun
and Manty Machine

EA-100KA

Connect with SB-880 or HLT-series, it can produce round shape products with or without stuffing. There are pattern, special pattern and without pattern forming molds for choice and are easy to exchange.

Advanced Design and Sanitation

The machine is easy to assemble, clean and maintain. All parts contacted with food are made of food standard stainless steel, plastic and aluminum alloys with special surface treatment.

Independent Motor Control System

Machine is controlled by high efficient, speed adjustable motors and inverters.

Features

- High production Capacity
- Variable product shapes

•Russia Patent No. : 84540




Video

Specification

Length	1000 mm
Width	510 mm
Height	1050 mm
Max. Capacity	6,000 pcs/hr
Electricity	220 V, 50/60 Hz, Single Phase, 0.4 kW
Product Weight	15-75 g/pc
Net Weight	100 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.

* Specifications are subject to change without notice.



Manty



Crystal Dumpling

Automatic Dual Line Imitation Hand Made Dumpling Machine

AFD-888

With uniform weight and various patterns, AFD-888 can produce handmade-like dumplings beyond your expectation.

Features
Dough is sheeted through continuous pressing rollers. After boiling, the dumpling wrapper is tasty like handmade. With an automatic dough wrapper residue recycle device.


Filling is Kept in Good Texture
A special piston filling device keeps all the ingredients in good condition and taste.

Several handmade-like patterns for choice.


●Taiwan Patent No. : I354540
●China Patent No. ZL 200910140712.2

Specification	
Length	2450 mm
Width	2000 mm
Height	2050 mm
Electricity	220/380 V, 50/60 Hz, 3 Phase, 3.5 kW (Air Supply)
Width of sheet Roller	230 mm
Product Weight	18-30 g (Standard) Custom Made is Available
Capacity	7,000-9,000 pcs/hr (2 Lines)
Net Weight	1,400 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.

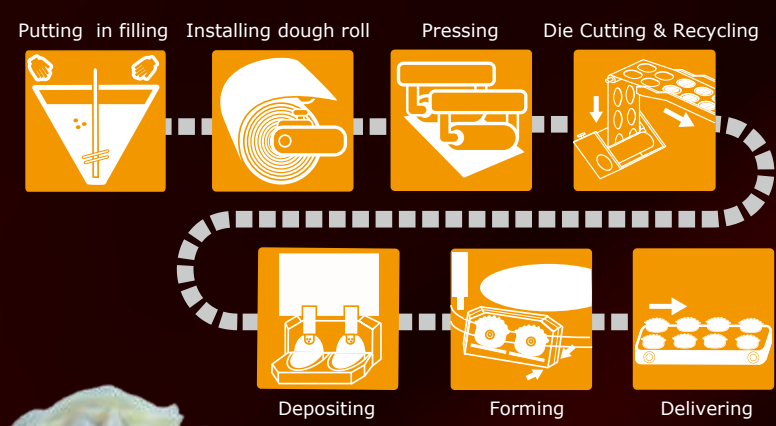

Video



▲ Filling



▲ Forming



▲ Optional delivering system



▲ Filling micro-adjustment

Automatic Dough Belt Making Machine ABS-220

Features
●Dough belt thickness can be adjusted.
●Easy Handling.
●With add-on equipment and mechanism, ABS-220 can also produce noodles, egg roll wrapper, wonton wrapper, shumai wrapper and dumpling wrapper,etc.
●There is another optional standard model ABS-300

Specification	
length	950 mm
Width	1300 mm
Height	1400 mm
Width of sheet roller	220 mm
Max. Capacity	100 kgs/hr (based on wheat flour)
Electricity	220/380 V, 50/60 Hz, 3 Phase, 2.25 kW
Thickness of Dough Belt	4-12 mm

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.



Video


Automatic Single and Double Line Shumai Machine

Unique design
Put the well-mixed dough and filling into the hoppers and switch on HSM. It will make dough wrapper (pressing, pulling and cutting), fill filling, form and send the products to the conveyor.

Advanced Design and Sanitation
The machine is easy to assemble, clean and maintain. All the parts contacted with food are made of food standard stainless steel and plastic. Sanitary and easy to operate.

Uniform Products and High Capacity
Thickness of wrapper and weight of filling are adjustable.

● Taiwan Patent No. : M413603, M430170
● CN Patent No. : ZL 2011 1 0042873.5

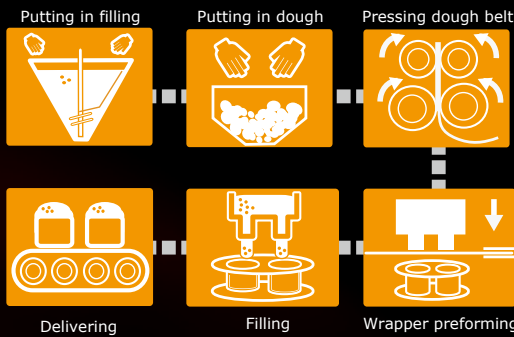

▲ Double Line



▲ Single Line



Specification

Length	1100 mm
Width	1450 mm
Height	2000 mm
Electricity	220/380/415 V, 50/60 Hz, 3 Phase, 3.25 kW
Net Weight	700 kgs

* Specifications are subject to change without notice.

Comparison Between HSM-600 and HSM-600J

Model	HSM-600	HSM-600J	
	Double Line	Single Line	Double Line
Product Weight	14-25 g	55-75 g	30-50 g
Thickness of Wrapper	0.4~0.5 mm	0.4-0.6 mm	
Capacity (pcs/hr)	5,000~6,000	2,500-3,000	3,500~5,000

* Production capacity is for reference only; it will change according to different product specification and recipe.



Video

HSM-600 SERIES

SemiAutomatic Seaweed Shumai Machine


Features

- Put well cut seaweed wrapper by hand.
- Filling, Forming, and delivering to the conveyor automatically.

Specification

Length	1900 mm
Width	1100 mm
Height	2600 mm
Electricity	220/380/415 V, 50/60 Hz, 3 phase, 1.5 kW
Product Weight	20~24 g
Capacity	3,300-4,000 pcs/hr
Net Weight	700 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.

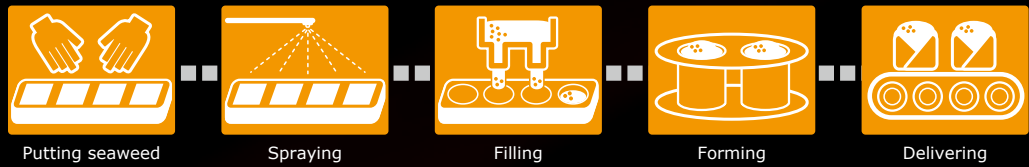

● Taiwan Patent No.I413603
● CN Patent No.201110042873.5



Video



Automatic Double Line & Triple Line Wonton Machine

HWT-SERIES

Unique Design
Put well-mixed dough and filling into hoppers, after switching on HWT, it will make dough wrapper by pressing, positioning, cutting, then fill filling, forming and send products to the conveyor automatically.


Filling will be kept in good taste after stirring, and won't leak because the tight clip process. Furthermore, weight of product is easy to adjust and products are like handmade.

- Features**
- Stable operation.
 - In moderate size, does not occupy large space.
 - Easy to assemble, maintain and disassemble.
 - For sanitation, all the parts contacted with food are made of food standard stainless steel and plastic.

Uniform Products and High Capacity
Thickness of wrapper and weight of filling are adjustable.

HWT-400
• Taiwan Patent No. : M430170, I430170
• China Patent No. : I413603

HWT-600T
• Taiwan Patent No. : M430170

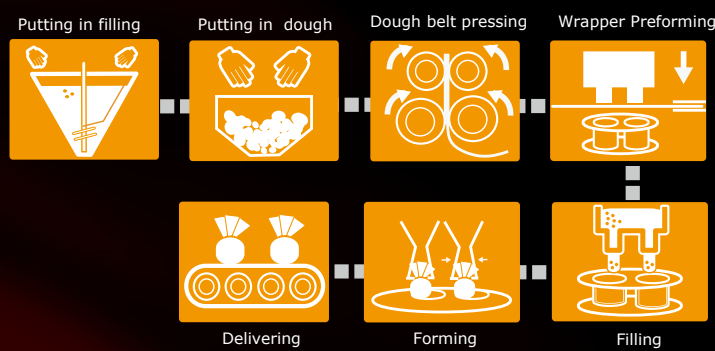

▲ Double Line



▲ Triple Line

Specification

Model	HWT-400	HWT-600T
Length	1450 mm	
Width	1100 mm	
Height	2000 mm	2200 mm
Electricity	220/380/415 V, 50/60 Hz, 3 Phase	220/380/415/440 V, 50/60 Hz, 3 Phase
	2.8 kW	2.25 kW

* Specifications are subject to change without notice.



Comparison Between HWT-400 and HWT-600T

Model	HWT-400	HWT-600T
	Double Line	Triple Line
Product Weight	12-17 g	4 g
Wrapper Size	95 x 95 mm	60 x 60 mm
Capacity	3,500-4,200 pcs/hr	4,800-6,500 pcs/hr
Net Weight	700 kgs	

* Production capacity is for reference only; it will change according to different product specification and recipe.



Video



Table Type Automatic Encrusting and Forming Machine

SD-97SS

SD-97SS is special designed for confectionery, savory food, small bakery shop of various ethnic snacks, restaurant, to go outlet. Price is very reasonable, but functions can compete with the commercial models. In addition to paste filling feeder (for minced meat, bean paste, chocolate paste, fruit jam, etc.), there is another powder filling feeder (for peanut powder, pistachio powder, almond powder, walnut powder, etc.) to create value added products.

Multiple Usage, Various Food Products
Special filling devices can produce various stuffed food products, such as vegetable bun, meat bun, rice cake, rice ball, mochi, crystal bun, moon cake, kubba, coxinha, marmoul, etc. Shutters are easy to exchange. There are various patterns for choices.

Individual Motors & Adjustable control system
Separate motors with stepless speed controller for dough, filling and forming systems. The ratio of filling to wrapper can be easily adjusted.

Various Fillings
Filling can be bean paste, chocolate, peanut powder, minced meat, sesame, etc.


Easy Reassemble and Clean
No tool needed, disassembly is quick and easy to clean and maintain.



Specification

Length	1120 mm
Width	550 mm
Height	1300 mm
Electricity	220 V, 50/60 Hz, Single Phase, 0.63 kW
Product Weight	15-50 g/pc
Capacity	1,500-3,600 pcs/hr
Net Weight	100 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.

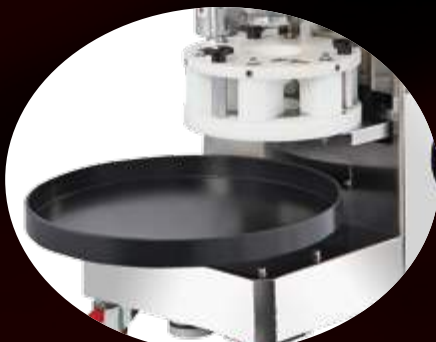

Rotary Plate Type



Conveyor Type



Maamoul



Filled Cookies



Kubba



Crystal Dumplings



Video

Automatic Encrusting
and Forming Machine

SD-97W

Features

Fillings can be bean paste, minced meat, sesame paste, fruit jam, etc. Special bicolor dough transmitting system can make bicolor wrapper food products.

Special filling device produces various stuffed food products, such as vegetable bun, meat bun, stuffed cookies, rice cake, rice ball, mochi, crystal bun, moon cake, kubba, coxinha, maamoul, etc. Shutters are easy to exchange. There are deep pattern, light pattern and special patterns for choices.


- Taiwan Patent No. : 134474, 147243, 068346, 140264, 187057, 196037, 202730, 200254, 1288611
- USA Patent No. : US6, 183, 171 B1 US6, 251, 462 B1 US6, 243, 779 B1 US6, 477, 944 B1
- Japan Patent No. : 3068098, 2003-27385
- Netherlands Patent No. : Nr.1017025
- France Patent No. : 0102141, 0315366
- China Patent No. : ZL98 2 25503.9 ZL98 3 32568.5 ZL 97 2 35267.8 ZL02 2 15572.4 ZL 02 2 17453.2 ZL02 2 15657.7 ZL20 03 20102568.1
- Germany Patent No. : Nr.10101776

Specification

Length	1300 mm
Width	815 mm
Height	1700 mm
Electricity	220 V, 50/60 Hz, Single Phase, 1.08 kW
Capacity	2,500-4,200 pcs/hr
Product Weight	15-70 g/pcs
Net Weight	265 kgs



Comes With Various Forming Shapes

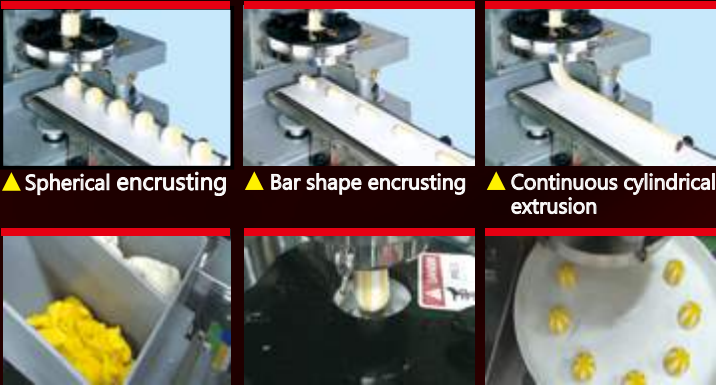

Video



Automatic Encrusting and
Forming Machine

SD-97L

Features

- Large Product (up to 200g).
- High capacity (Max. 4,800pcs/hr).
- Dual-states pressurize filling system.
- Ideal dough system for leaven dough.
- Extensible for double filling product.

Advantage


- It is easy for operation, clean, assembly and maintenance.
- Different materials can be applied for the encrusting product skin, such as :
 1. Beef + bulgur => for Kubba/Kibbe
 2. All purpose flour, high gluten flour, yeast dough => for different buns
 3. Rice starch dough => for tangyuan, rice ball, and mochi
 4. Cookie dough => for cookies
- Specially designed dough extruding device does less damage to the dough texture, which gives better result to your product.

Specification


Length	1350 mm
Width	920 mm
Height	1370 mm
Electricity	220/380/415V, 50/60 Hz , Single/3 Phase, 2.3 kw
Capacity	2400~4800 pcs/hr
Product Weight	40-200 g/pcs
Net Weight	360 kgs



Video



- Taiwan Patent No. : 134474, 147243, 068346, 140264, 187057, 196037, 202730, 200254, 1288611
- USA Patent No. : US6, 183, 171 B1 US6, 251, 462 B1 US6, 243, 779 B1 US6, 477, 944 B1
- Japan Patent No. : 3068098, 2003-27385
- Netherlands Patent No. : Nr.1017025
- France Patent No. : 0102141, 0315366
- China Patent No. : ZL98 2 25503.9 ZL98 3 32568.5 ZL 97 2 35267.8 ZL02 2 15572.4 ZL 02 2 17453.2 ZL02 2 15657.7 ZL20 03 20102568.1
- Germany Patent No. : Nr.10101776

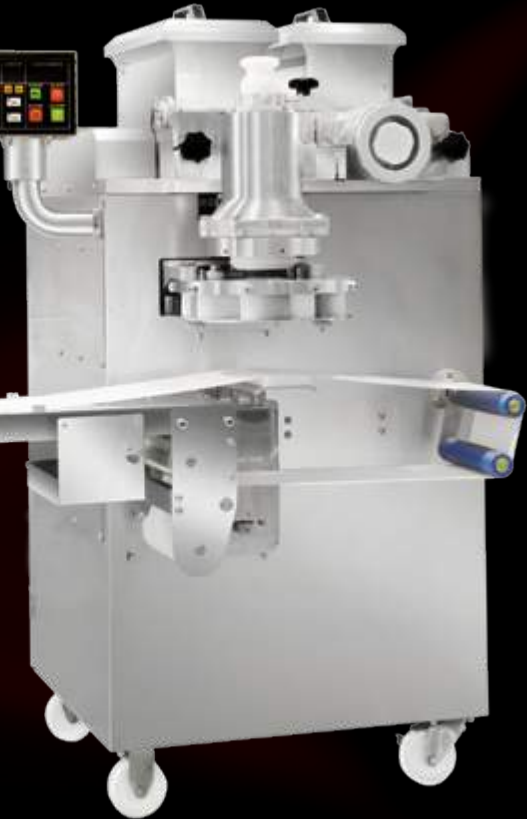

Just put dough and stuffing into hoppers, the finished maamouls or moon cakes will be aligned onto baking trays automatically.

Flexible Space Arrangement

Combines stamping and aligning functions in one machine to save space for your flexible space arrangement.

Hassle Free Product Ejection

Special device is applied on STA-360, no more product ejection problem from stamping mold.

Customized Stamping Mold


Stamping Shape and pattern can be customized for your unique products.

Specification

	Encrusting and forming machine (SD-97W)	Stamping and Aligning Machine (STA-360)
Height	1780mm	1500mm
Width	750mm	2900mm
Length	960mm	2500mm
Electricity	220V, 50/60Hz , Single Phase	
	1.08kW	0.3kW
Product Weight	15-70g	
Capacity	2500-4200 pcs/hr	

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.

- Taiwan Patent No. : 134474, 147243, 068346, 140264, 187057, 196037, 202730, 200254, 1288611
- USA Patent No. : US 6,183,171 B1, US 6,234,779 B1, US 6,477,944 B1
- Japan Patent No. : 3068098
- Netherlands Patent No. : Nr.1017025
- France Patent No. : 01 02141, 03 15366
- China Patent No. : ZL98 2 25503.9, ZL98 3 32568.5, ZL97 2 35267.8, ZL02 2 15572.4, ZL02 2 17453.2, ZL02 2 15657.7, ZL 2003 2 0102568.1
- Germany Patent No. : Nr.10101776

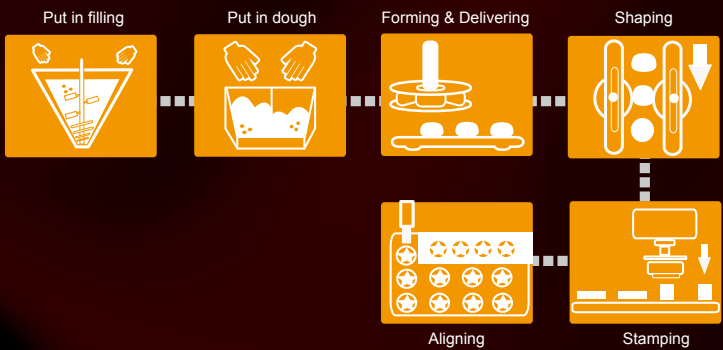

Moon Cake

Mammoul (Various Shape)



Automatic Rounding Conveyor

RC-180

RC-180 is an optional machine of SD-97 series. Through the rounding machine, the shape of the product will be more round .

Specification

Length	1620 mm
Width	670 mm
Height	1145 mm
Electricity	110/220/380/415 V, 50/60 Hz, Single Phase, 180 W
Maximum capacity	3,000-6,000 pcs/hr
Product Weight	10-35 g
Diameter of Product	10-30 mm
Speed of Conveyor	2-15 m/min
Speed of Rounding Device	30-140 circles/min
Net Weight	140 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.



Chin chin



Rice Balls



Rasgulla



<Optional Device: CE Cover>



Video

Fully Automatic Blini Production Line

BN-24

Specification


Length	8200 mm
Width	2200 mm
Height	2000 mm
Electricity	220/380/415/440 V, 50/60 Hz, 3 Phase, 3.2 kW
Pneumatic Air Consumption	400 L/min (6 kgs/cm³)
Product Weight	35-75 g
Product Size	Length : 100 mm Diameter : 40 mm
Max. Capacity	2,000 pcs/hr

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.

●Taiwan Patent No. : M457429
●USA Patent No. : 8,505,445
●China Patent No. : ZL200620148890.1
●Italy Patent No. : 0000266110



Video

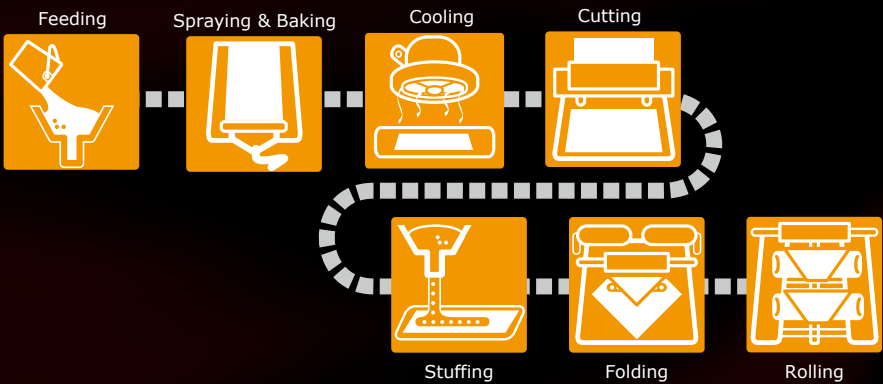

SR-24 is equipped with a special folding & rolling device to wrap spring rolls like handmade. SR-24 provides high production capacity.

Features

- Advanced Design, Sanitary and Safety Devices.
- Reasonable Price.
- Easy to operate, reassemble, clean and maintain.
- Uniform Products and High Capacity.

Specification

Length	7500 mm
Width	1300 mm
Height	2200 mm
Electricity	220/380/415/440 V, 50/60 Hz, 3 Phase, 38 kW
Pneumatic Air Consumption	400 L/min, (6 kg/cm³)
Product Weight	40-50 g
Product Size	Length : 100 mm Diameter : 25-30 mm
Capacity	2,400 pcs/hr

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.

- Taiwan Patent No. : I391097, M457429
- USA Patent No. : US 8,505,445, US 7,963,216
- China Patent No. : ZL 2006 2 0148890.1
- Italy Patent No. : 0000266110

Advantage

- Unique imitation of manual wrapping process gives fulfilled firm body to every spring roll.
- After frying, the crispy spring roll does not carry much oil residue at its both ends.
- New special depositing devices can apply different fillings as below:
 1. Vegetable filling
 2. Mixed vegetable and meat filling
 3. Meat filling
 4. Mixed bean sprout and meat filling
- Other available fillings:



Curry Vegetable



Vermicelli And Vegetable



Vegetable




Vegetable & Beef



Beef



Bean Sprout And Beef

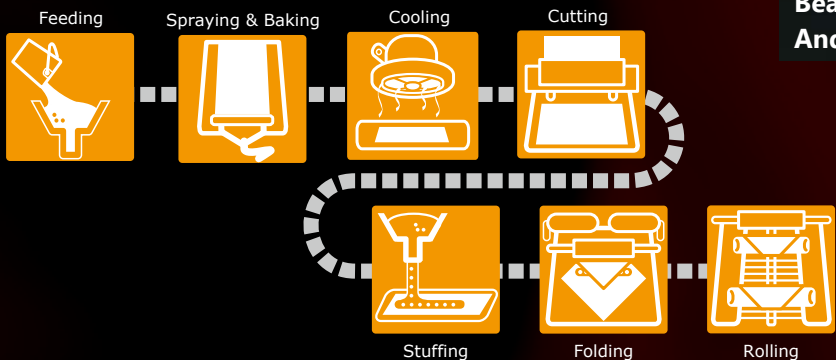

Cooling fan



Video

Baking drum

Forming conveyor



Rotary cutter



Filling system



Rolling net

Automatic Spring Roll, Samosa Pastry Sheet and Crepe Machine

SRP-SERIES

With a unique and reliable design; the SRP series make spring roll pastry and samosa pastry sheets. After the pastry sheets are cut, they are counted and stacked in piles on a conveyor belt, and ready for packaging.

Taiwan Patent No. : 165964



Specification

Model	SRP-20A	SRP-45A
Drum Size	3500(L) x 930(W) x 1570(H) mm	5800(L) x 1200(W) x 1800(H) mm
Electricity	220/380/415 V, 50/60 Hz, 3 Phase (Special power can be accommodated)	
	19 kW	35 kW
Capacity	Spring Roll	1,200 pc/hr
	Samosa	3,600 pc/hr
Pastry Width	Sizes can be accommodated	
Pastry Thickness	0.4-0.8 mm	

* Production capacity is for reference only; it will change according to different product specification and recipe.




Video



Spring Roll Pastry



Samosa Pastry



Crepes

Semi-Automatic Spring Roll and Samosa Production Line

SRPF-SERIES

SRPF machines are designed to make food products including spring roll, samosa and other types of food that require thin wrapper. Various stuffings can be used such as beef, pork, seafood and vegetable. The SRPF machines are perfect for using in production line.

Unique and Reliable Design

SRPF machines are designed to produce a continuous baked sheet to be cut into pieces. Both length and width of the pastry sheet can be adjusted to desired specifications. A stuffing depositor places stuffing and glue paste onto pastries as they travel along a conveyor system. Workers at both sides of the conveyor then wrap and roll these into spring rolls.

Specification

Model	SRPF-20A	SRPF-45A
Baking Machine	1500 (L) x 1000 (W) x 1650 (H) mm	1800 (L) x 1200 (W) x 1900 (H) mm
Stuffing Depositor	1200 (L) x 700 (W) x 1800 (H) mm	1200 (L) x 700 (W) x 1800 (H) mm
Conveyor	1300 (L) x 600 (W) x 1250 (H) mm	1300 (L) x 600 (W) x 1250 (H) mm
Conveyor of Cutter	4500 (L) x 800 (W) x 1100 (H) mm	4500 (L) x 800 (W) x 1100 (H) mm
Power	20 kW	37 kW
	220/380/415 V, 50/60 Hz, 3 Phase (Special power can be accommodated)	

* Specifications are subject to change without notice.



Capacity

Model	Spring Roll	Samosa
SRPF-20	900-1,200 pcs/hr	1,800-2,400 pcs/hr
SRPF-45	2,400-2,700 pcs/hr	4,800-5,400 pcs/hr

* Production capacity is for reference only; it will change according to different product specification and recipe.

Specification of Products

Model	SRPF-20A	SRPF-45A
Max Pastry Width	220 mm (Special sizes can be accommodated)	
Pastry Thickness	0.4-0.8 mm	
Product Weight	40-160 g/pc	
Filling quantity	20-50 g/pc	

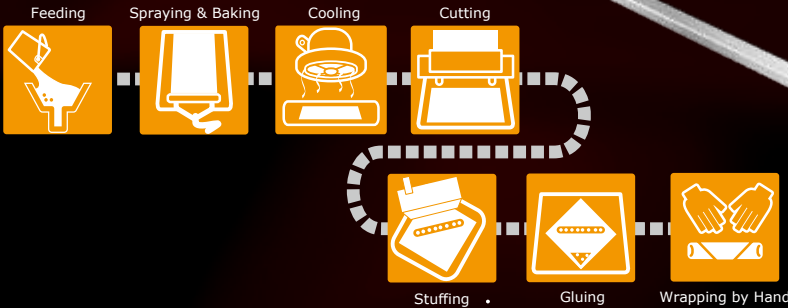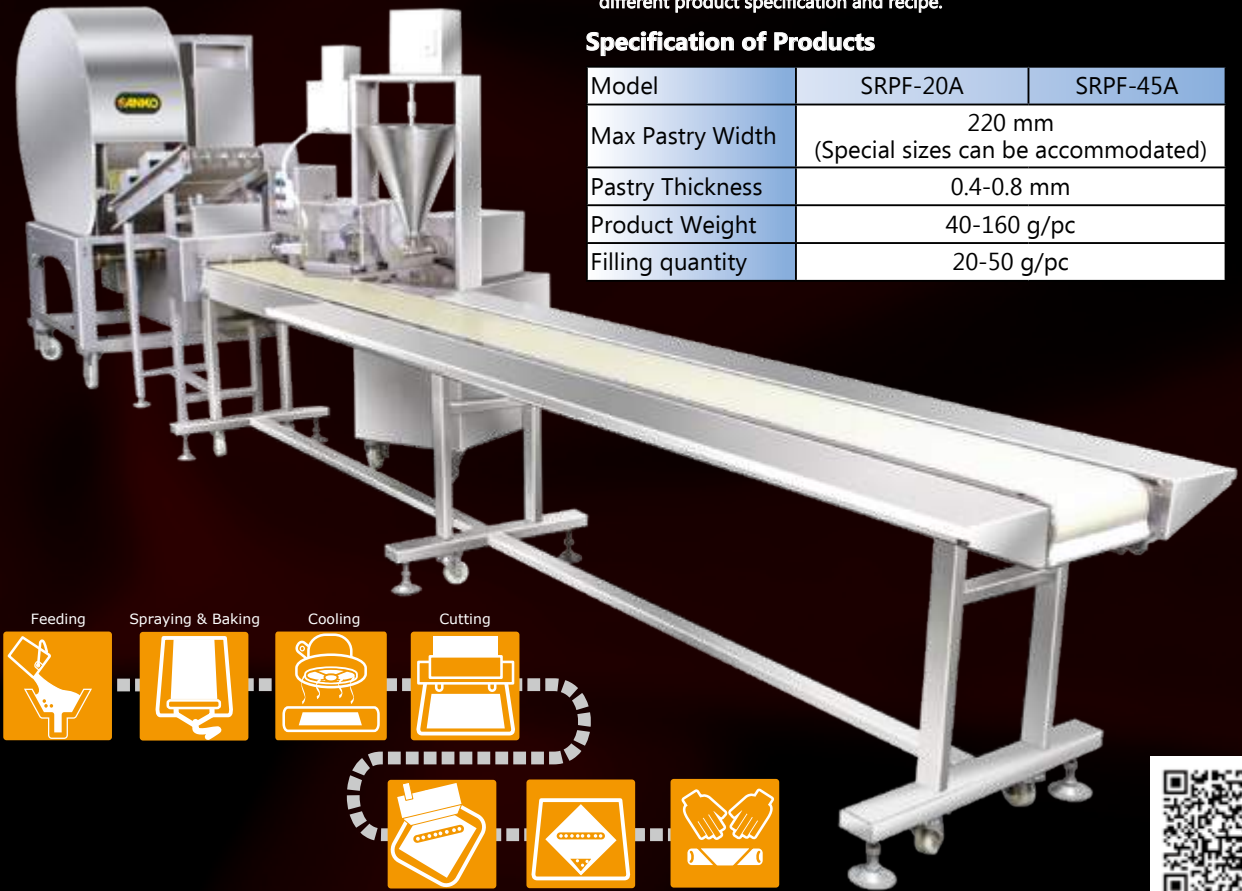

Samosa



Spring Roll



Video

Optional Equipment of Spring Roll Machine

Batter Storing, Cooling & Resting Tank

Model : BW-400
Size : 1200 (L) x 1000 (W) x 1900 (H) mm
Tank Volume : 400 L
Loading Volume : 350 L
Electricity : 220/380/415V, 50/60HZ,
single/ 3 phase, 1.9 kW



Batter Storing, Cooling & Resting Tank

Model : BW-400
Size : 1200 (L) x 1000 (W) x 1900 (H) mm
Tank Volume : 400 L
Loading Volume : 350 L
Electricity : 220/380/415V, 50/60HZ,
single/ 3 phase, 1.9 kW



Batter Mixer

Model : BM-150
Size : 900 (W) x 000 (L) x 1850 (H) mm
Tank Volume : 150 L
Loading Volume : 100 L
Electricity : 220/380/415 V, 50/60 HZ,
single/ 3 phase, 2.25 kW
Speed:0-250RPM



Vietnamese Rice Paper Spring Roll Machine

RPS-SERIES

Features

- Equips with a water soften machine to avoid any hard water deposits blocking pipes or machine.
- Temperature is stable and conveyor speed of tunnel steamer is adjustable for easy control of rice paper softness.
- Stuffing is extruded by a screw pump (nemo pump). It is quantitative, stable and keeps texture of stuffing.
- Dia. & length of stuffing is adjustable.
- Automatic rice paper sucking & aligning and folding facilities are optional.
- Spraying water goes through a heating device for saving steaming time. The temperature of heating device is adjustable.



Vietnamese Spring Rolls



Video

Specification

Model	Main Machine	Control Box	Stuffing Extruder
Length	6650 mm	500 mm	1300 mm
Width	950 mm	270 mm	500 mm
Height	1400 mm	1500 mm	1800 mm
Electricity	220/380/415 V, 50/60 Hz, 3 Phase, 23 kW		220/380 V, 50/60 Hz, 3 Phase, 0.75 kW (Air Supply : 0.75 kW)
Net Weight	600 kgs	30 kgs	100 kgs

* Specifications are subject to change without notice.

Production Capacity

Model	RPS-24	RPS-48
Max.capacity	2,400 rolls/hr	4,800 pcs/hr

* Production capacity is for reference only; it will change according to different product specification and recipe.



1. Set rice paper (manual) spray water. absorb excess water.



2. Extruding stuffing quantitatively at the set location.



Rice paper

Fully Automatic Finger Spring Roll Production Line

FSP

FSP series machines are designed to produce a continuous sheet of baked pastry skin. A stuffing extruder then continuously extrudes stuffing and applies glue paste onto the pastry sheet. Then a special rolling and cutting device will roll and cut the spring roll into the desired size automatically.

Wide Variety of Products

Pastry : spring roll pastries, crepes, egg sheets, etc.

Stuffing : meat, cheese, red bean paste, chocolate, date paste, fruit jam, etc.

Combine different kinds of pastry and stuffing, you may create new value added snack of finger food.

Advanced Design, Sanitary & Safe Device

The machine is easy to assemble, clean and maintain.

All parts contacted with food are made of food grade stainless steel. All the electronic components meet the international standard.

Specification

Diameter of Baking Drum	1,200 mm
Machine size	6500(L) x 1500(W) x 2400(H) mm
Power	220/380/415/440 V, 50/60 Hz, 3 Phase, 35 kW
Stuffing hopper capacity	31 L
Net Weight	1,200 kgs
Pastry Width	Max. 220 mm
Pastry Thickness	0.4-0.7 mm
Length of Spring Roll	75-300 mm
Diameter of Spring Roll	15-25 mm
Capacity	1,600-6,400 pcs/hr

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.

Automatic Single/Double Production Line of Sealed Ends Finger Spring Roll

FSPC

Features

Advanced design, sanitary and safe device

The machine is easy to assemble, clean and maintain. All parts contacted with food are made of food grade stainless steel. All the electronic components meet the International standard.

●Taiwan Patent No. : M250556, 165964

●Japan Patent No. : 3107931



Video

Specification


Machine Size	7500 (L) x 2000 (W) x 1900 (H) mm
Electricity	220/380/415/440 V, 50/60 Hz, 3 Phase, 48 kw
Product Length	Over 120 mm
Product Weight	Over 30 g/pc
Product Diameter	12~25 mm
Capacity	4,000 pcs/hr (Based on length 120 mm)
Net Weight	1,600 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.



SP series is suitable for the food industries equipped with dough belt maker or dough sheeter such as bakeries, restaurant chains, central kitchens, etc. SP series focuses on food forming that needs many labors in a manual process. For people who have dough making machines and need to save space and cost, our compact production line is the solution to moderately convert a manual to a semi-automated process, in the meanwhile, boost hourly capacity. SP series can process 180 kg dough in an hour. The capacity will be estimated in accordance with individual product dough weight.

Process Flowchart

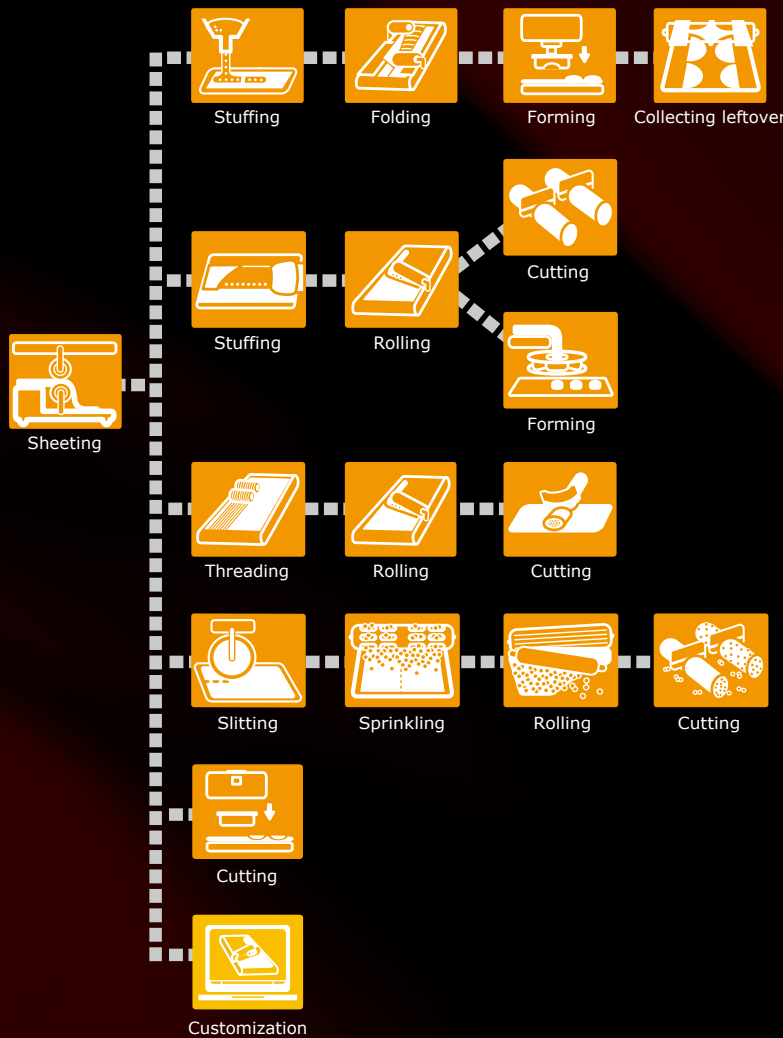

▲ Sheeting



▲ Threading



▲ Stuffing



▲ Stuffing



▲ Rolling



▲ Folding



▲ Forming



▲ Forming



▲ Cutting




▲ Collecting leftovers

Features

- Standard length of semi-automatic production line: within 6 m
- Medium/low capacity
- Easy operation and cleaning
- Flexible to change parts such as knife, mold, stuffing machine, etc. to produce various foods





*The machine shown above is for reference only, which is about X m. Actual machine appearance will vary according to requirements for food products.

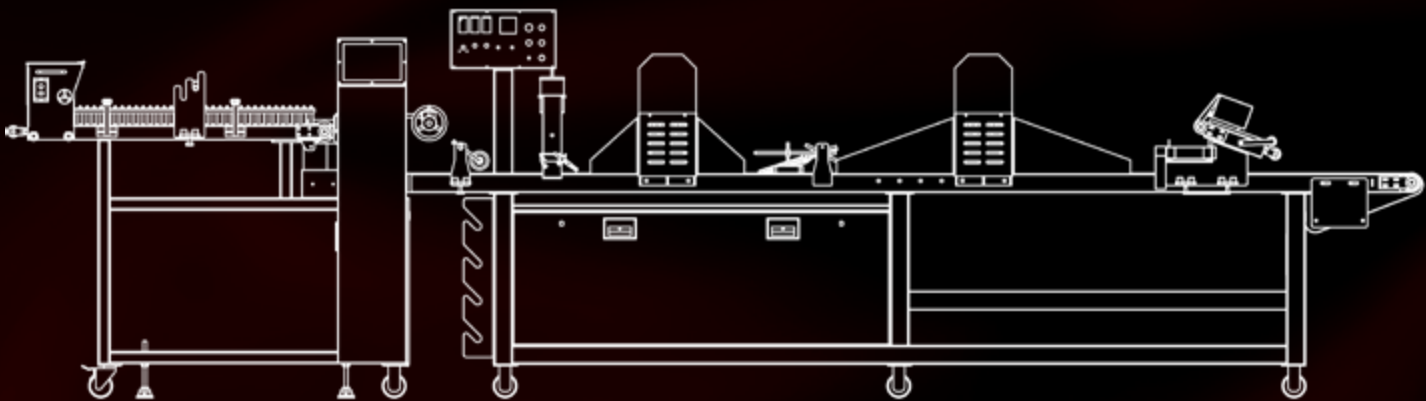

MP series mainly has two stages: dough belt making and food forming. For meeting the needs of higher capacity to run central kitchens, food factories, restaurant chains, etc., we recommend the fully automatic MP series. ANKO offers food manufacturers the great flexibility of customizing machine. Depending on individual production processes, the MP series is able to be installed optional automated equipment such as rolling, folding, stuffing, dusting, etc. The adjustment service of recipe or machine structure is also provided until customers are satisfied. We even supply our valuable recipes for more perfect performance of our machine.

MP series can process 360 kg dough in an hour. The capacity will be estimated in accordance with individual product dough weight.

Process Flowchart

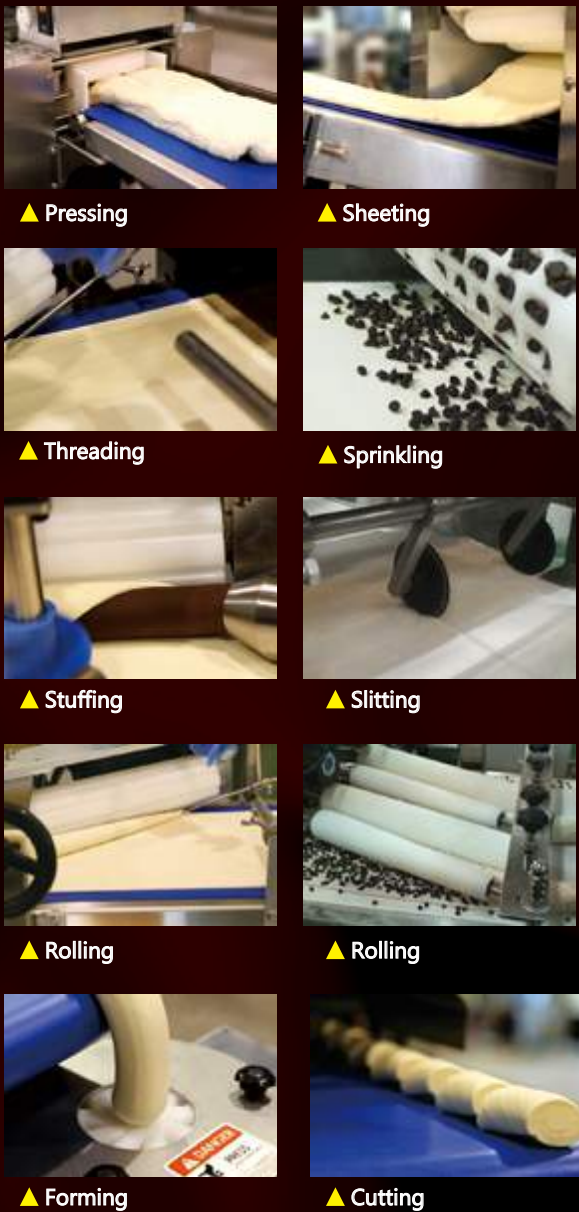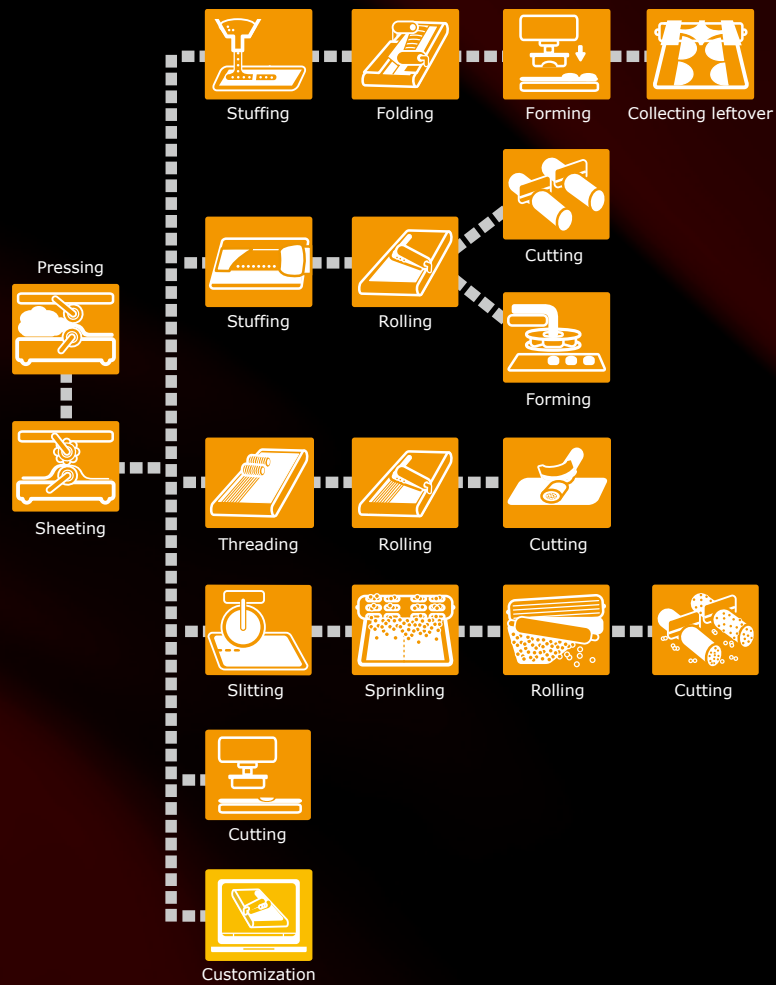


Features

- Standard length of automatic production line: 5-10 m
- High/medium capacity
- Easy operation and cleaning
- Flexible to change parts such as knife, mold, stuffing machine, etc. to produce various foods





*Image is for reference only. Actual machine appearance will vary according to requirements for food products.

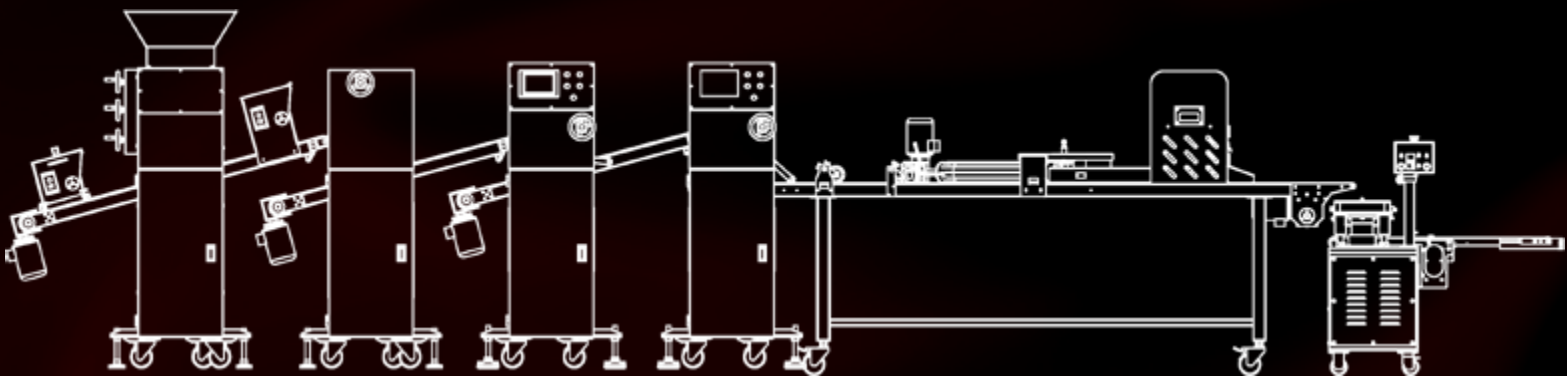

Even the complicated production of paratha can be fully automated! BP series is exactly designed to produce food with multiple processes. ANKO's layer pastry production line delivers pastry products with a maximum of 128 layers, working with various processing units such as stuffing, cutting, oil dropping, filming, leftovers recycling, etc. to save food and labor costs. Moreover, ANKO has year's experience to help customers build new production lines out of nothing through our comprehensive turnkey projects, from material preparation, production, cooking to packaging, based on expected capacity and available space. Double or triple production lines are also provided for higher capacity and efficiency. BP series can process 600 kg dough in an hour. The capacity will be estimated in accordance with individual product dough weight.

Process Flowchart

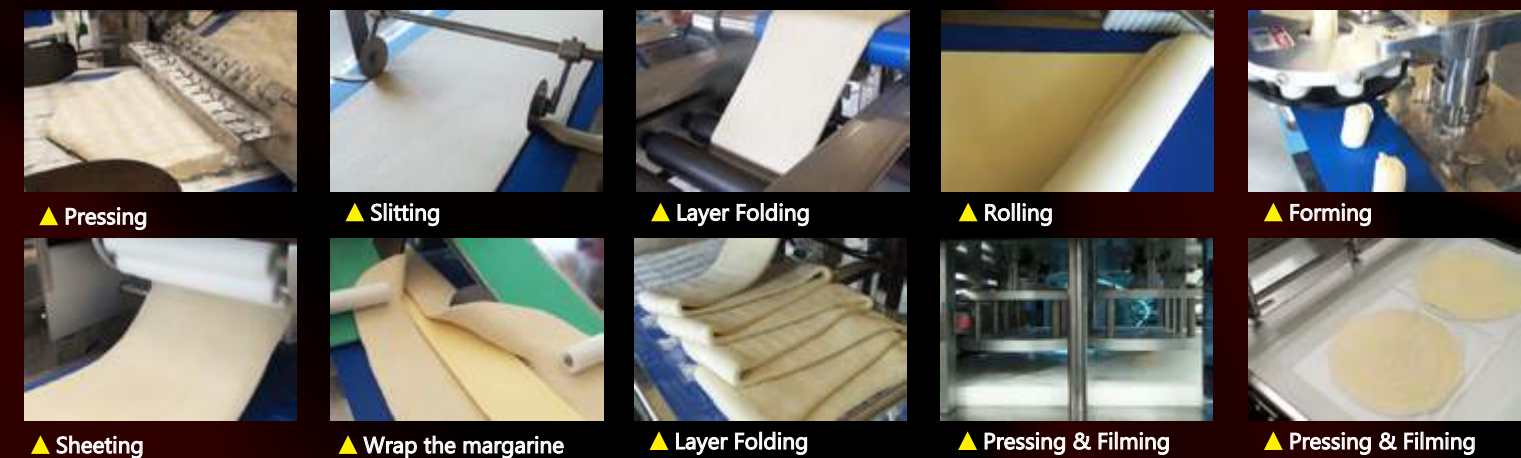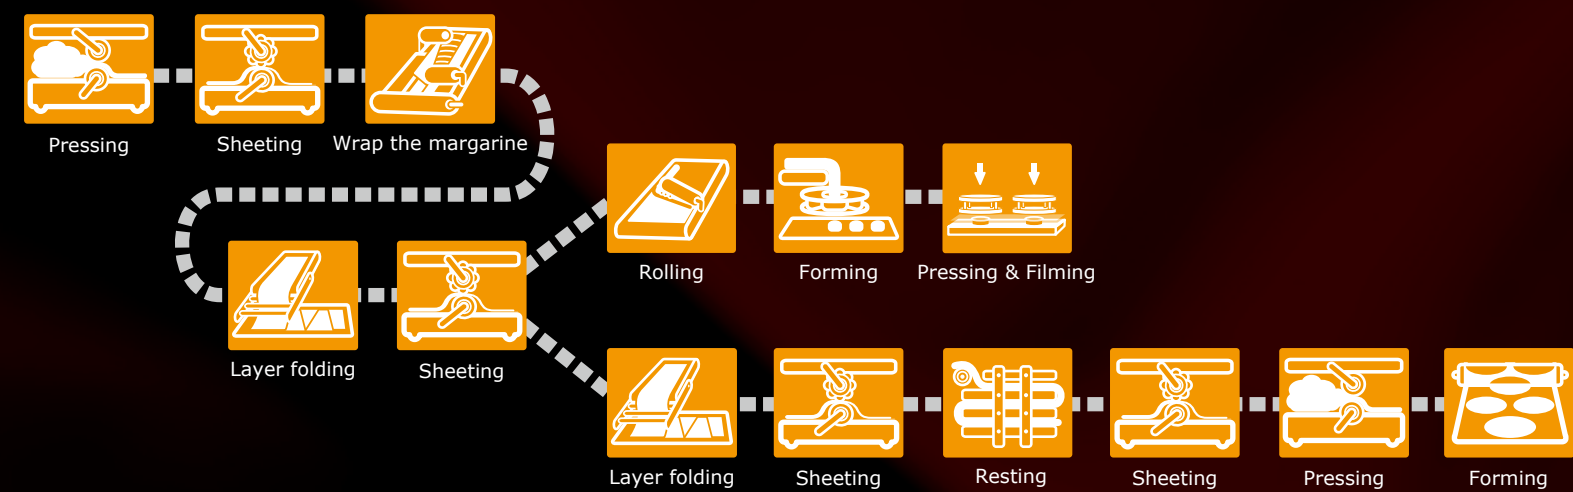


Features

- Standard length of production line: over 10 m
- High/medium capacity
- Easy operation and cleaning
- Flexible to change parts such as knife, mold, stuffing machine, etc. to produce various foods



*Image is for reference only. Actual machine appearance will vary according to requirements for food products.

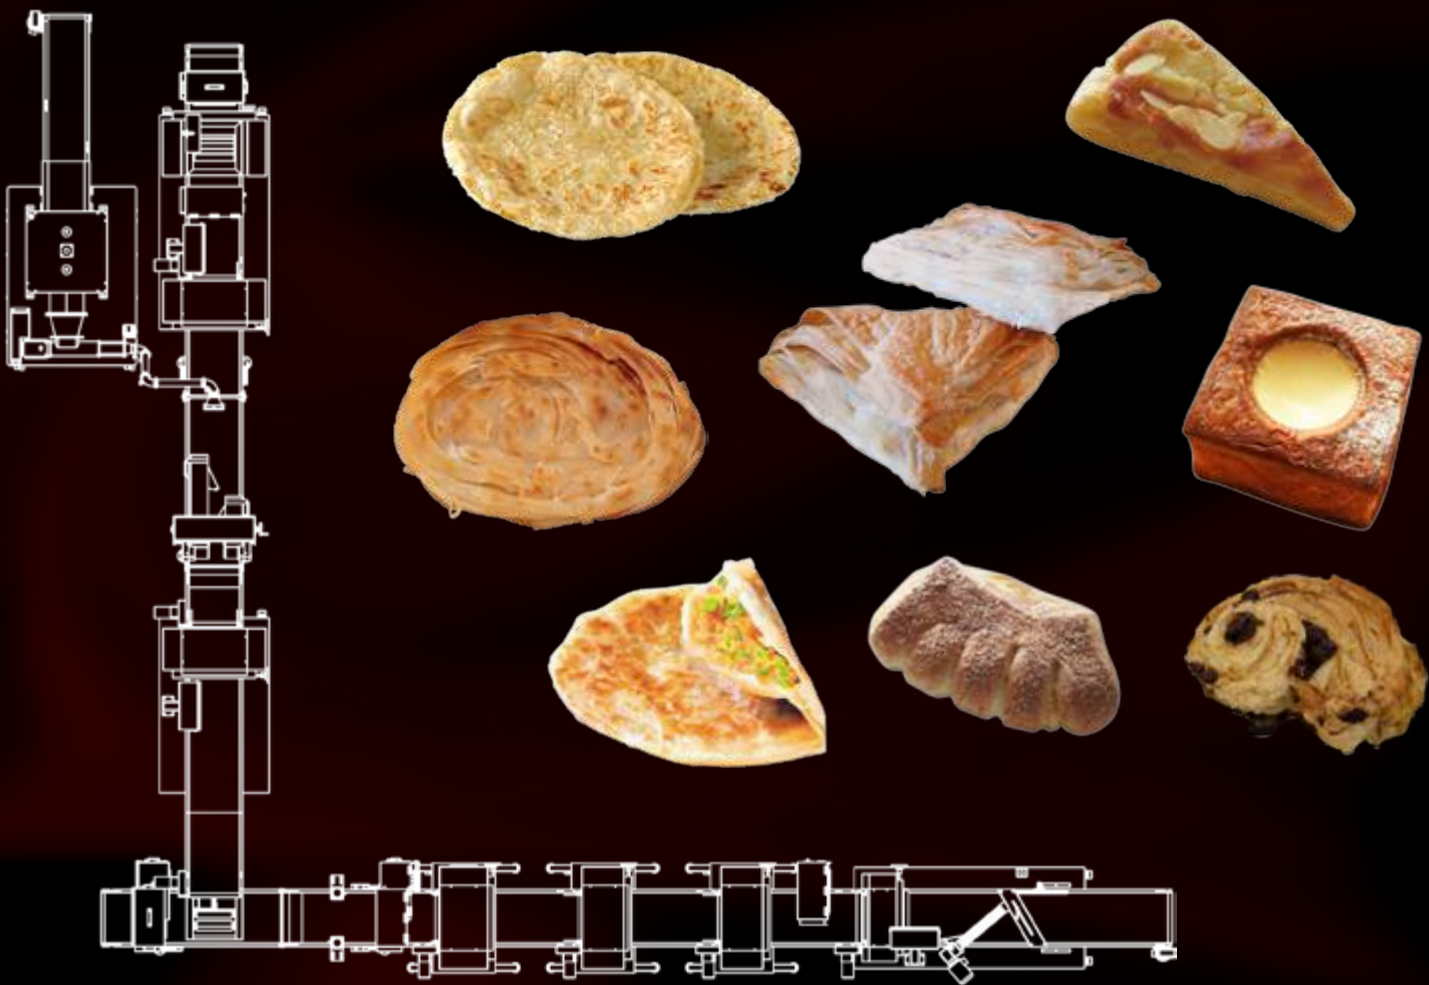

Kibbi Mosul Pastry Production Line

The Kibbi Mosul pastry production line equips with a depositor and an Automatic Filming and Pressing Machine. It deposits viscous meat balls regularly, films plastic covers, presses balls into circular pastries, and cuts, which can make 2,400 pastries per hour.



▲ Control Panel



▲ Air Pump Cylinder Of Pressing Plate



▲ Film Clamping Pattern Mold Specifications




Specification

Main Machine	3,500 (L) x 960 (W) x 1,470 (H) mm
Stacking Conveyor	1,650 (L) x 670 (W) x 710 (H) mm
Electricity	220 V, 50/60 Hz, Single Phase, 1 kW
Capacity	2,400 pcs/hr (based on 80g)
Diameter of Product	80 - 140 mm
Weight of Product	100 - 200 g/pc



Video

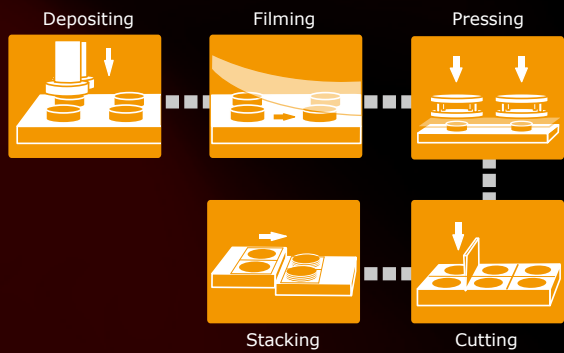

Automatic Filming and Pressing Machine


PP-2

Special Design

Place rested dough balls between the top and bottom films, then pneumatic pressing plates will press them into about 3 mm thin pastries, and then cut film. It is suitable for making paratha and Chinese green onion pie.

Features

There are films at both top and bottom of dough balls to prevent dough balls sticking on the pressing plates or conveyor. It can equip an optional counter and stacker to stack products at a setting quantity.

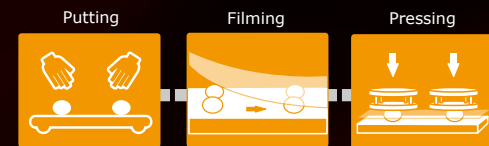

Specification

Main machine	2900 (L) x 960 (W) x 1470 (H) mm
Stacking conveyor	1650 (L) x 670 (W) x 710 (H) mm
Power	220 V, 50/60 Hz, Single phase, 120 W
Pressing plate size	235 mm (2pcs)
Product diameter	Max. 200 mm
Capacity	1,500 pcs/hr
Pneumatic Air Consumption	480 L/min(@8 kg/cm3)
Net Weight	700 kgs

* Descriptions & Specifications are subject to change without notice.



▲ A. After resting, place the rested dough balls between the top and bottom films.



▲ B. Through a sensor, rested dough balls will be delivered to the pressing location to be pressed into finished products and be stacked at a set quantity, then delivered out by conveyor.



Video



Pressing & Heating Machine

APB

Features

- Filling is Kept in Good Texture
- High Capacity

Specification

Depth	750 mm
Width	1180 mm
Height	1600 mm
Size of heating plate	350(W) X 350(D) mm
Electricity	220/380/415V, 3 Phase, 50/60Hz
Capacity	800-1000 pcs/hr/line
Thickness	1-3 mm
Machine Weight	190 kgs

* Specifications are subject to change without notice.



Baking while Pressing



Video



Peking Duck Wrapper



Roti



Tortilla



Puri



Chapati



Automatic Cutting and Rounding Machine

GD-12 SERIES

Unique design. Put well-kneaded material into machine to be cut & rounded into required products.

Products are Various and Unified

Use different kinds of material except wheat flour, such as potato starch, tapioca, corn starch, taro starch, sweet potato starch, etc., to make ball products, fish baits, or pills.

Easy to Operate. Save Time and Labor

Various Shape of Products

It can produce round and cylindrical shapes.

High Production Capacity

Dia. of Product : 0.95 cm : 30 kgs/hr
Dia. of Product : 1.75 cm : 180 kgs/hr

- Taiwan Patent No. : 116096
- China Patent No. : ZL96 2 22714.5



Video



Glutinous Rice Balls/ Marzipan Balls



Fish bait/boile

Specification

Model	GD-12	GD-12B
Length	800 mm	
Width	800 mm	
Height	1200 mm	
Electricity	220V/380V/415V, 50/60Hz, Single/3 phase	
Net Weight	0.75 kW	1.5 kW
	240 kgs	260 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.



Taro Ball

Sweet Potato Ball



Sweet Potato Ball



GD-12
Speed unadjustable



GD-12B
Speed adjustable

Automatic Meat Ball and Fish Ball Production Plant

Automatic Meat Ball and Fish Ball Machine

FMB-60 can make beef balls, pork balls, fish balls, squid balls, etc. The capacity depends on the water content in material, production speed and the size of the forming mold.

FMS-8 Stirring and Kneading Machine (for Fish Ball)

Production Capacity : 50 kgs per batch
Power : 220/380/415 V, 3 Phase, 2.25 kw
Net/Gross Weight : 550 kgs/650 kgs
Dimension : 1250 (L) x 820 (W) x 1400 (H) mm

FMS-12 Frozen Meat Cutter and Slicer


Production Capacity : 350-500 kgs per hour
Power : 380 V, 3 Phase, 3.75 kw
Net/Gross Weight : 180 kgs/600 kgs
Dimension : 850 (L) x 1420 (W) x 1600 (H) mm

FMM-32 Automatic Meat Mincer and Strainer

Production Capacity : 350-500 kgs per hour
Power : 220/380 V, 3 Phase, 3.75 kw
Net/Gross Weight : 175 kgs/240 kgs
Dimension : 1000 (L) x 400 (W) x 1650 (H) mm

FSB-120 High-Speed Blender (for Meat Ball)

Production Capacity : 120 kgs per batch
Power : 220/380 V, 3 Phase, 7.5 kw
Net/Gross Weight : 650 kgs/850 kgs
Dimension : 1500 (L) x 1030 (W) x 1740 (H) mm

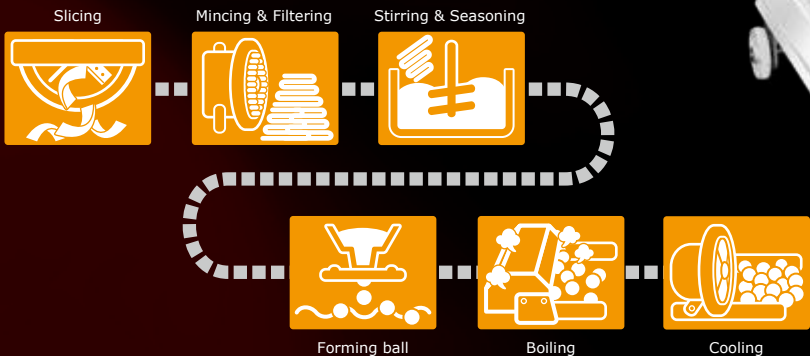

Specification of FMB-60

Dimension	500 (L) x 800 (W) x 1400 (H) mm
Ball Size	18~35 mm
Power	220/380V, 50/60Hz, Single Phase : 1/2 HP ; 3 Phase : 1 HP
Production Capacity	Dia. 20 : 300 pcs/min Dia. 25 : 200 pcs/min Dia. 35 : 100 pcs/min
Net/Gross Weight	150 kgs/200 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.



Video



FMS-8



FMM-32



FMS-12



FSB-120



Meat Ball



Meat Ball & Fish Ball

FMB-60

Multiple Function Stir Fryer

Multiple Usage

For stir frying, seasoning, mixing rice, noodle, vermicelli, vegetable, sesame, bean, peanut, meat, diced and shredded meat, coffee bean, sugar, coating candy, biscuit, pistachio, herb, etc.

Features

- Electronic ignition control, stepless speed adjustment, clockwise and counterclockwise directions.
- Temperature is adjustable.
- Special internal capstan barrel, food like noodle or spaghetti will not be broken.
- The external casing is made of special grade of heat isolator which could keep heat inside to save 33% of gas.
- Made of durable stainless steel.
- Easy loading and discharging. With time setting, easy to operate.
- Various capacity available.



SF-60



Specification

Model	SF-2	SF-60	SF-120
Length	510 mm	1250 mm	2060 mm
Width	620 mm	1400 mm	1880 mm
Height	1300 mm	1600 mm	1820 mm
Power	110/220 V, 50/60 Hz, Single Phase, 0.2 kW	220/380/415V, 50/60 Hz, 3 phase, 0.75 kW	
Capacity	2 L	60 L	120 L
Net Weight	90 Kg	422 Kg	850 Kg

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.

- Taiwan Patent No. 44252
- USA Patent No. DES 366.182
- Germany Patent No. Nr.M9406112.2
- Japan Patent No. 8-13067
- France Patent No. 946232
- China Patent No. ZL93403734.X
- England Patent No. 2040842



Video



SF-120



Fried Noodle

SF-SERIES

Automatic Horizontal
Cake Slicer

CS-480

Features

- Double band saws for excellent slicing.
- Distance of slicing and conveyor speed are adjustable.
- Easy to operate and maintain.


Specification

Length	1380 mm
Width	900 mm
Height	1160 mm
Electricity	220 V, 50/60 Hz, Single Phase, 0.375 kW
Machine Weight	110 kgs
Capacity	200 pcs/hr (based on cake dia 300 mm)
Numbers of Slice	2~3 Slices (Thickness is adjustable at every 5 mm)
Cake size	Height : 50~150 mm Diameter or Width : 400 mm

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.



Video

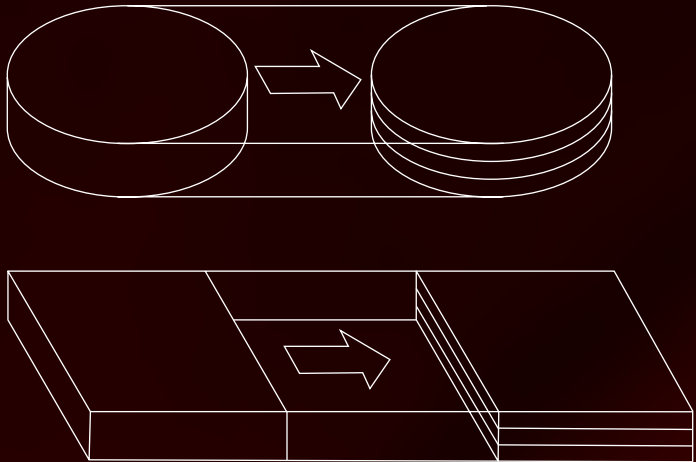

Ice Box Cookies
Extruder and Slicer

SK-60S/SL-110

Features

SK-60S

- Great dough texture protection as handmade.
- Inverter speed control, suitable for various material.
- Keep nuts, chocolate, beans in piece after mixing with dough.
- Customise molds are available, easy to change.
- High efficiency machine with minimum space occupied.
- Foldable conveyor to save space.

SL-110

- High efficiency bench cutter. Sliced cookies are neat and not sticking with each other.
- Easy to operate and maintain.
- High efficiency machine with minimum space occupied.

Specification

Model	SK-60S
Length	1080 mm
Width	450 mm
Height	1080 mm
Electricity	220V, 50/60 Hz, Single/ 3 Phase, 0.4 kW
Capacity	400-4,000 g/min
Shaping Mold Diameter	Max.60 mm
Net Weight	100 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.

Model	SL-110
Length	930 mm
Width	420 mm
Height	530 mm
Electricity	220V, 50/60 Hz, Single/ 3 Phase, 0.2 kW
Capacity	Max.60 slices/min (60Hz) Max.50 slices/min (50Hz)
Cookie Size	Max. 60 (H) mm ; Max. 110 (W) mm
Cookies Thickness	0-18 mm
Net Weight	65 kgs

* Production capacity is for reference only; it will change according to different product specification and recipe.
* Specifications are subject to change without notice.



SK-60S



Video



SL-110



Automatic Batter and Crumb Breeding Production Line

BBCB

Features of Batter Breeding Machine

- Keep the batter homogeneous and recycle to use.
- Can pump both light and thick batter.
- Breeding by falling or immersing. Products are breaded evenly.
- Conveyor belt can be lifted up. Parts can be taken apart without tool. Easy to clean.
- Supporting legs are adjustable, can be equiped with other machines.

Feature of Powder/Crumb Coating Machine

- Wheels are made of SUS 304.
- Stair type conveyer. Conveyor belt is formed by stainless steel bar.
- Breeding by falling and touching. Products are breaded evenly and pretty.
- Customization machine is available.

Specification

Model	WBB-400	SBB-400	CB-400
Length	1350 mm	2225 mm	220 mm
Width	850 mm	870 mm	1070 mm
Height	1550 mm	1600 mm	1500 mm
Electricity	220/380 V, 50/60 Hz, 3 phase, 0.8 kW	220/380 V, 50/60 Hz, 3 phase, 1.5 kW	220/380 V, 50/60 Hz, 3 Phase, 1.5 kW
Capacity	250 kgs/hr		

* WBB-400 suitable for the batter viscosity under 5000P.C.M (1Kg water mix with 0.5Kg flour)
* SBB-400 suitable for the batter viscosity higher than 5000P.C.M (1Kg water mix with over 0.5Kg flour)
* CB-400 suitable for dry crumb or powder material, size under 8mm.
* Specifications are subject to change without notice.



Video



▲ Put fishes into machine.



▲ Fishes are sent out with batter coated.



▲ Powder/crumb breeding.



▲ Fishes are sent out with powder/crumb coated.

Gas Steamer

Multiple Usage

With multiple and more effective devices, the patented steamers are excellent in steaming and sterilizing.

Features

- Time and temperature settings.
- Equipped with an evaporator for quicker boiling.
- Auto water-feeding.
- Even steam distribution by steam pressure reducing valve.
- Energy-saving boiling device.
- See-through door.
- Made of stainless steel.

Customization is Available

- Taiwan Patent No. : 114054
- USA Patent No. : US6098527
- Thailand Patent No. : 00165

Specification

Model	AS-610	AS-60
Length	1117 mm	765 mm
Width	927 mm	693 mm
Height	2058 mm	1330 mm
Max. Temperature	100 °C	100 °C
Electricity	220 V, 50/60 Hz, Single Phase	
Trays	12	12
Size of Tray	605(L)x605 (W)x8 (H) mm	465(L)x465(W)x8(H) mm
LPG GAS	BTU 165,600/HR	BTU 88,320/HR
NATURAL GAS	BTU 124,000/HR	BTU66,240/HR



Video



AS-610
Boiler/Electric Type



AS-60
Boiler/Electric Type



AS-80 Boiler Type

AS-100
Electric Type



Dough sheeter

DS-650

Food Processing Machine

Feature

- Up to 20 groups of memory, each group can be built up to 24 pressing process and thickness set up.
- Conveyor speed, dusting volume or disable dusting function can be set on each pressing process individually.
- 6-8kg dough per batch is recommended.

Depth	3450 mm
Width	1050 mm
Height	1390 mm
Electricity	220/380/415V, 50/60Hz, Single/3Phase, 1.5kW
Conveyor size	650 x 3000 mm
Roller width	650 mm
Net Weight	320 kgs



Video

Planetary Mixer(ML-15)

Size: 650(W) x 610(D) x 1,070(H) mm
Hopper Capacity : 12 kgs
Power : 1.5 kW



Automatic Spiral Mixer (ML-202E)

Size: 1,090(W) x 670(D) x 1,140(H) mm
Hopper Capacity : 50 kgs
Electricity : 5.1 kW



Conveyor Fryer (AF-589)

Size : 1650 (L) x 740 (W) x 1660 (H) mm
Electricity : 220/380/415 V, 12 kw, 3 Phase

- Temperature is controlled by micro-controller.
- Digital temperature input can provide accurate frying temperature and keep quality stable.
- Automatic Temperature Control.
- Overheating protection device is equipped, if abnormal heating is over 240℃ , the power will be shut off automatically.
- Temperature Error : ±1℃



Customization is Available

Multipurpose Vegetable Cutting Machine (ACD-800)

Capacity
Leaf side:200-1000kg/hr,
Root various:200-600kg/hr
Electricity : 220/380 V, 50/60Hz,
single/three phase,
with inverter control

Product Size :

- Slicing :
 - a.1-3mm (3pcs blade)
 - b.3-6mm (2pcs blade)
 - c.8-12mm (1 pc blade)
- Dicing Mesh :
 - a.8 x 8 mm, 12 x 12 mm, 10 x 10 mm
 - b.15 x 15 mm, 20 x 20 mm, 25 x 25 mm
 - 30 x 30 mm, 20 x 40 mm
- Rounding Shread : Dia. 4, 6 mm
- Square Shread : 3-6 mm



Food Processing Machine

Hydro-Extractor (YL-22)

Capacity : 15~25 kgs

Power : 110/220 V, 50/60 HZ, single/3 phase

With one filter bag



Automatic Seasoning Mixer (ARM-100I)

Capacity : 60 kgs

Power : 220/380/415V, 50/60HZ, 3 phase



High Speed Dicing Machine (AD-1000)

Size : 700 (L) x 710 (W) x 1020 (H) mm

Power : 220/380 V, 50/60 Hz,

Single / 3 Phase, 0.75 kw

Capacity : 300~1500 kgs/hr



Continuous-type Sealing Machine (SA-113)

Size : 1410(L) x 580(w) x 1120(H) mm

Power : 110/220 V, 50/60 Hz, Single Phase

Max. Capacity Per Bag : 1 kgs

Sealing Speed : 9 m/min



Vibro Separator & Filter (NS-450)

Size : 650 (L) x 520 (W) x 1040 (H) mm

Capacity : 200 kgs/hr

Screen : 30 mesh

Power : 110/220 V, 50/60 Hz,

Single Phase, 1/2 HP